



DESIGNING AN INVENTORY MODEL FOR REVERSE SUPPLY CHAIN WITH REMANUFACTURING PROCESS

Arman BAHARI¹, Mohammad Taghi TAGHAVI FARD^{2*}, Mohammad KHALILZADEH¹

¹ Department of Industrial Engineering, Science and Research Branch, Islamic Azad University, Tehran, Iran.

² Department of Industrial Management, Faculty of Accounting and Management, Allameh Tabatabaie University, Tehran, Iran.

***Corresponding Author:**

Email: D.taghavifard@gmail.com

ABSTRACT

Sustainability has become a significant subject in most economies, causing many leading organizations to focus on product recovery and reverse logistics. However, work with quantitative models is still rare. This research is focused on inventory control in the remanufacturing process. In the model presented in this paper, product demand can be carry out by remanufactured and new items to minimize the use of raw materials. In this regard, the basic assumption is that the remanufactured products are as good as new products, and the recurrence items from customers can be remanufactured at a fixed rate. In this study, a method has been developed to model the reverse supply chain variables. An approach is used for the calculation of optimum level for the new items and the optimum level of the returned items for remanufacturing together. The major objective is to minimize the waste and gain the competitive advantage of cost of conversion. From among advantages of using the method, we may refer to simultaneous calculation of optimized level of newly produced items, and optimized level of returned items for remanufacturing with the aim of minimizing wastes, and achieving competitive advantage of transformation cost. From the model analysis, it can be concluded that the cost of ordering new products, the capacity of the remanufacturing process, the final product demand, the maintenance costs of returning items inventory for remanufacturing, and the maintenance cost of new product inventory for should be at a low level.

Keywords: Inventory Control, Inventory Model, Reverse Supply Chain, Remanufacturing.

INTRODUCTION

The concept of Reverse supply chain, which is the management or return flow due to product recovery, products return, or overstock, is not new (Jayant et al, 2012). The reuse of products has been previously applied, essentially for the economic benefits of reusing the component and materials instead of its disposal (Fleischmann et al., 1997). Also, technology advances have reduced the life cycles for many products. Product demand may growth rapidly at first and then decrease a few months later due to the importance of new products. Inventory control under a short life cycle of product is not easy. Due to an increase in many problems such as large safety stock, high costs of obsolescence, and high forecasting errors, it is essential to consider the constantly varying demand and its uncertainty when making inventory management policy (Hsueh, 2011). In addition to economic motivations and technology improvements, manufacturers require producing products which are easy for disassembly, reuse and remanufacturing owing to the law of environmental protection. On the other hand, the number of customers supporting environmental protection by delivering their used goods to collection

points and remanufacturing centers is increasing (Jayant et al, 2012). Moreover, government pressure has contributed to the increasing motivation for global environmental warning and green supply chain management principles (Sheu and Chen, 2012).

Reverse logistics has been implemented long before the term was initially adopted, such as military, customer service policy, and the automotive aftermarket (Rogers et al., 1999). The rise of e-commerce and the positive vision of environmental impact has elevated the formal use of reverse logistics (Bei et al., 2005). So, in today's business environment, due to most common reasons such as product returns, incorrect delivery of product and damaged products, reserve logistic is inevitable (Fleischmann et al., 1997).

Moreover, it can be of higher importance in one industry over another due to production costs and the nature of remanufacturing of the products (Bazan et al., 2015b). In this way, some products can receive values along the reverse chain by mean of recycling or remanufacturing processes (Silva Filho et al., 2013). The remanufacturing process can be briefly described as (Quanwu et al., 2016):

First, products collected from customers (at the end of life) and disassembled into their constituent components. Next, the parts are remanufactured to exact specifications to ensure that they provide the same quality as new ones. Last, remanufactured components are assembled, tested and made ready for sale as the remanufactured product.

the concern for managing product return flow (Bazan et al., 2015a), justified the growing interest in development of inventory control models to study and analyze reverse supply chains (van der Laan et al., 2006; Behret et al., 2009). Also, another difficulty of managing reverse operations is the need to effectively coordinate manufacturing and remanufacturing activities (Inderfurth et al., 2001). This trend in the industry has led several researchers to investigate such problems and develop appropriate models to account for cases where remanufacturing of used products is an additional choice for the reserve logistics (Nenes et al., 2010). The present study focuses on the deterministic approach of optimizing the reverse logistics inventory model, to analyze the mathematics complication in the associated processes. The paper is organized as follows: a literature review is presented, followed by a review of mathematical models and a discussion summarizing what has been achieved and what needs to be done with the emphasis on environmental concerns. The paper concludes with findings and future research directions.

Related works

Research on reverse supply chain has been growing since the Sixties and research on strategies and models on reverse logistics can be seen in the publications in and after the Eighties (Jayant et al, 2012). There are numerous studies that analyze inventory models with return flow in Reverse supply chain. These models can be classified into two groups including deterministic models (e.g. Richter and Dobos, 2004; Teunter et al., 2009; Zanoni et al., 2012; Feng et al., 2014; Ozceylan et al., 2014) and stochastic models (e.g., Fleischmann et al., 2002; Behret and Korugan, 2009; Zolfagharinia and Haughton, 2012; van Donselaar and Broekmeulen, 2013). In this section, we aim to make contributions to the stochastic and deterministic reviewed modeling literature.

The root of these models is the work of Schrady (1967) (Fleischmann et al., 1997) which is based on the classical economic order quantity (EOQ) model. He analyzed an inventory situation with constant demand and return rates when production and recovery are instantaneous (Brojeswar



et al., 2013). The work of Schrady has been developed extensively as presented in the literature (Fleischmann et al., 1997).

Richter's model, a direct extension of the model of Schrady, shows that for low disposal rates, the repair setup cost has no effect on the total lot size. For large waste disposal rates, the setup cost of manufacturing has no effect (Richter, 1996b). This assumption by Richter state that some items may be disposed of as waste (Richter, 1996a). Richter and Dobos developed the work of Richter (1996a, 1996b) to discussed a model in which the disposal option of the returned items is allowed and all the recycling batches follow the production batches (Dobos and Richter, 2003).

Similar to Richter, Teunter extended the work of Schrady by assuming that unit holding costs for newly manufactured and remanufactured items are different, and considered more than one production and repair cycles (Teunter, 2001). He considered stochastic demand and return rates and assumed no lead time. Discounted costs were also considered to make the model more realistic (Teunter, 2002). Widyadana and Wee Also developed an integrated solution procedure for each of the two policies of Teunter using algebraic approaches (Widyadana & wee, 2010). Konstantaras and Papachristos developed the model of Teunter by allowing for the complete back ordering of demand (Konstantaras and Papachristos, 2006) and improved his work by developing an exact solution that leads to the optimal number of manufacturing and remanufacturing for certain parameter classes (Konstantarasa, Papachristos, 2008). However, they consider only the restricted classes of (1, R) and (P, 1) policies (Konstantaras and Papachristos 2006).

Koh et al. (2002) studied a model allowing the recovery rate to be both smaller and larger than the demand rate. Working within two classes of policies, namely the class of policies with one procurement lot and a variable number of recovery lots and the class of policies with one recovery lot and a variable number of procurement lots, they derived optimal lot-sizing formulas (Koh et al., 2002). Choi et al. also presented a joint EOQ and EPQ model for an inventory control problem in a reserve supply chain, in which the demand can be satisfied by purchasing brand-new products and remanufacturing used products (Choi et al., 2007).

El Saadany and Jaber also extended the work of Richter (1996a, 1996b) to account for setup changeover costs when switching between productions and remanufacturing runs (El Saadany and Jaber, 2008). They suggested that the return flow of used items depends on the purchase price and the accepted quality level of the returned items (El Saadany and Jaber, 2010). Van der Laan et al. (1996) considered several inventory control strategies with remanufacturing and disposal (van der Laan et al., 1996) by assuming that the demand rate and return rate are independent (Hsueh, 2011). Also Push and pull strategies are considered in the inventory model (van der Laan and Teunter, 2006) to coordinate production, remanufacturing, and disposal operations. Sun et al. in their study investigated a manufacturing and remanufacturing inventory system with return rate dependent on the product demand. Also, a three stage stochastic dynamic programming is developed to explore an optimal inventory policy (Sun et al., 2013).

Another work developed by Poles is a production and inventory system for remanufacturing using a System Dynamics simulation modeling approach. The research findings reveal efficiency in the remanufacturing process with higher remanufacturing capacity if the quantity of returned items and the remanufacturing lead time are increased and decreased respectively



(Poles, 2013). A stochastic linear quadratic Gaussian (LQG) model with constraints has been formulated by Silva Filho and Salviano to provide optimal annual plans for manufacturing, remanufacturing and disposal variables. Assuming the demand as stationary and normally distributed, an associated equivalent deterministic problem is introduced. So, optimal inventory-production scenarios can be created by variation of parameters such as return rate of used products, delay of return, or even both (Silva Filho & Salviano, 2013).

Zolfagharinia et al. developed a new inventory control model for joint purchasing and remanufacturing in a reverse supply chain. Also, they designed a new hybrid solution method, a meta-heuristic algorithm seeking for a near-optimum solution with an embedded simulation model that approximates the objective value of each generated solution (Zolfagharinia et al., 2014). In table 1 papers related to parameters investigation on reverse logistics has been listed.

Table 1: Literature Based on Various Issues of RL Design (Jayant et al, 2012)

Contents	Literature
Modeling of uncertainty	Pati et al. (2008) (Shih, 2001; Krikke et al., 2003). (Fleischmann et al., 2001), (Shih, 2001), refrigerator (Krikke et al., 2003), (Schultmann et al., 2003), LPG-tanks (le Blanc et al., 2004), (Salema et al., 2006), (Salema et al., 2007), (Pati et al., 2008), carpet recycling (Realff et al., 2000, 2004), Krikke et al. (2003), Du and Evans (2008) (Srivastava, 2008), (Lee and Dong, 2008).
Reverse supply chain network with stochastic model	Fohlen and Farris (1992), Kolbin (1977), (Listes, 2002, 2007) (Listes and Dekker, 2005), Wojanowski, Verter, and Boyaci (2007), Gupta, and Kamarthi (2004)

Describing the Proposed Model

As shown in figure (1), two operational cycles are working simultaneously. Remanufacturing and repairable process, consisting of items from direct production, and remanufacturing. Soon after collection of a certain value of returned products (R), remanufacturing begins. It is supposed that remanufactured items are as good as new items, and could be used as an appropriate alternative for products from direct production. Again, when certain uncertainties exist in the rate of collecting returned items for remanufacturing, safety stock is suggested to be used as a shock absorber during fluctuations of rates of returned items.

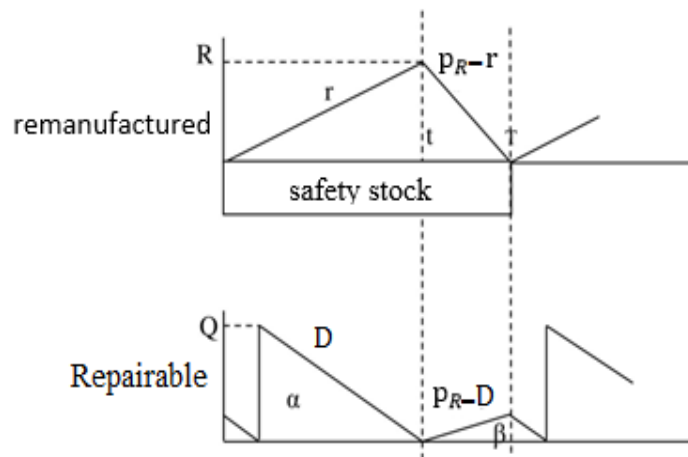


Figure 1: Estimating market demand through remanufactured and new items modeling

From mathematical calculations, we are aiming at calculating optimized value of direct manufacturing (Q) and Remanufacturing (R) to begin remanufacturing and safety stock cycles.

- **Variables and parameters of proposed model**

Table (1) shown the variables used for the model:

Table 1. Proposed model variables and parameters

variables	Description
r	Average rate of collecting returned items from customers per time unit (unit/time);
p_R	remanufacturing Capacity (unit/time);
D	Average demand for final products(time/unit);
C_R	set up cost of remanufacturing process (Rls./set up);
C_O	Cost of ordering new items(Rls./order);
C_{HR}	maintenance cost of returned items for remanufacturing(Rls./unit/time);
C_H	Direct products maintenance cost (Rls. unit/ time);
T	Cycle time;
T_r	The time after which remanufacturing begins;
R	Inventory level of remanufactured items;
Q	Value of order for new items;
S_r	Value of safety stock in remanufacturing for taking care of variation of rate of collecting returned items;
Z	The number of standard deviations for a specified service level, which can be extracted directly from the normal distribution table;
σ_L	The standard deviation during the lead time period;
d_i	The standard deviation for each day during the lead time period;



Proposed model is used for behavioral analysis and finding optimized value of R, Q, S_r

In order to formulize the model, following hypotheses are considered:

- Cost parameters are specified and will remain fixed;
- Purchase and remanufacturing time intervals are fixed;
- Collection rate is lower than remanufacturing rate;
- Demand rate is higher than collection rate.

- **Mathematical Formulation**

Cost of remanufactured items includes set up and maintenance costs. So, total cost of remanufacturing is:

$$= C_R + R \times \frac{C_{HR}}{2} \times T \quad (1)$$

Cost of repairable items includes ordering cost and cost of maintaining for triangles α and β (fig. 1).

$$C_O = \text{ordering cost} \quad (2)$$

Cost of maintaining for triangle α in figure (1) equals:

$$= \frac{D \times C_H}{2} \left\{ T_r - \frac{P_R - D}{D} (T - T_r) \right\}^2 \quad (3)$$

Cost of maintaining for triangle β in figure (1) equals:

$$= \frac{P_R(P_R - D)C_H}{2D} (T - T_r)^2 \quad (4)$$

It also could be shown that:

$$T = \frac{P_R \times R}{r(P_R - r)} \quad (5)$$

And,

$$T_r = \frac{R}{r} \quad (6)$$

Using equations (1) to (6), we have total cost as:

$$TC = \frac{r(P_R - r)(C_R + C_0)}{P_R \times R} + \frac{C_{HR}}{2} R + \frac{C_H}{2D(P_R - r)} \left\{ r(P_R - D) + \frac{P_R(D - r)^2}{r} \right\} R \quad (7)$$

Since equation (7) is a function of R, we may have optimized value of R through distinguishing total cost (TC) according to R, and then making it equal to zero. Therefore, optimized value of R would be:

$$R = \sqrt{\frac{r(P_R - r)(C_R + C_0)}{P_R \times A_1}} \quad (8)$$

Where:

$$A_1 = \frac{C_{HR}}{2} + \frac{C_H}{2D(P_R - r)} \left\{ \frac{P_R \times (D - r)^2}{r} + r(P_R - D) \right\}$$

Also, Q would be calculated via following equation:

$$Q = \frac{P_R \times (D - r)}{r(P_R - r)} R \quad (9)$$

- **Safety stock**

Due to the variation of the demand rate, it is so important to consider the stock out condition in the direct manufacturing. The model considering the safety stock is showing in figure (1) with higher demand in the triangle AOB. Due to higher demand, the zero stock condition take place at X instead of B (figure 1). Therefore, to deal with this situation, a safety stock is essential.

The Safety stock can be computed via concept of service level. Service level is adjusted for very high values (more than 90%), which means that there is one such situation in every 100 cases, and items could be supplied from stock at least 90 times.

The Safety stock can be specified as: $Z \sigma_L$

σ_L can be calculated as:

$$\sigma_L = \sqrt{\sum_{i=1}^L (\sigma_{d_i})^2}$$

Numerical Example

In order to validate the model, a sample problem has been considered with following data:

$r = 150$ unit/month

$P_R = 350$ unit/month

$D = 250$ unit/month

$C_o = 15$ Rls.

$C_R = 25$ Rls.

$C_{HR} = 2$ Rls.

$C_H = 3$ Rls.

$\sigma_{d_i} = 5$ unit

Level of services which have to be maintained is 95%.

Purchase cost of new items = 8 Rls.; and,

Purchase cost of collecting returned items for remanufacturing = 4 Rls. /unit.

Using equations (8), (9), and (5), following values could be obtained, respectively:

$$R \cong 37, Q = 55, T = 0.555 \text{ month} = 16.65 \text{ day} \cong 17 \text{ day}$$

Safety stock also would be obtained as:

$$Z\sigma_T = 1.65 \times \sqrt{\sum_{i=1}^{17} (5)^2} = 1.65 \times \sqrt{17 \times 25} \cong 34$$

Therefore, total cost of each cycle is:

TC = total cost of inventory without safety stock, as calculated through equation (7) + cost of safety stock + cost of purchasing new items + cost of purchasing returned items for remanufacturing.

Now,

TC without safety stock = 109.55 Rls.

Cost of safety stock = $8 \times 34 = 272$ Rls.

Cost of purchasing new items without safety stock = $8 \times 55 = 440$ Rls.

Cost of purchasing returned items = 222 Rls.

Total cost = $109.55 + 272 + 440 + 222 = 1043.55$ which is considered 1044 Rls.

DATA ANALYSIS AND DISCUSSION

To analyze the model and its inventory system, a developed mathematical model was used to find the relationship between various parameters in various situations. Hence, parameters will be selected and their relationships becomes clear. Applied values in the analysis are standard values



used in ordinary production units. A brief interpretation of behavior is also presented to examine validity of the model.

As it is demonstrated, figure (2) shows value of C_o against big values of R and Q . it is clear that in general, values of R and Q are uniformly increased through increase of C_o , and the difference between R and Q shows that in bigger values of C_o , relative increase of Q is higher.

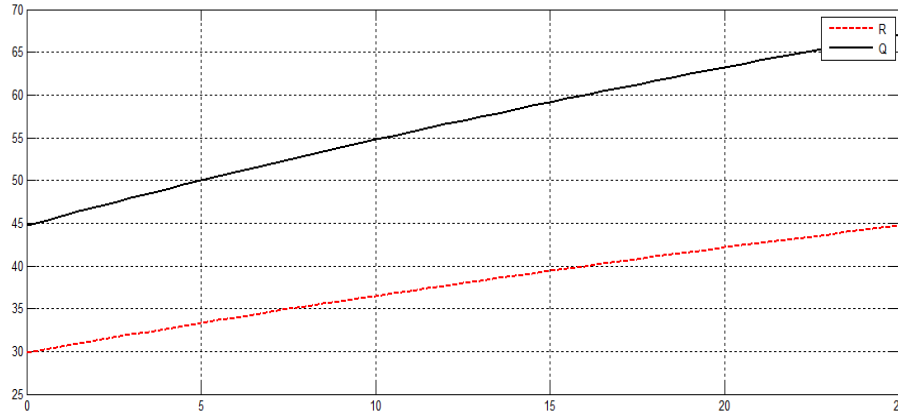


Figure 2. Effect of order cost (C_o)



C_s Changes (shown in figure (3)) has considerable effect on the values of R and Q . First, both items are increased. After C_R reaching to almost 20, Q will be increased with higher rate. However, this increase is of little effect on the difference between R and Q ; so, it could be mentioned that both of these values are changing in linear form through C_R changes.

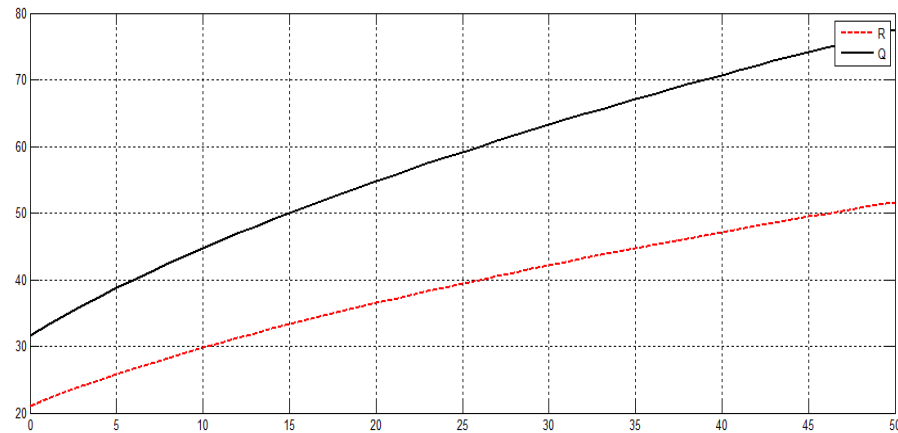


Figure 3. Effect of remanufacturing setup cost (C_R)

Affect from P_R changes in figure (4) shows that through increase of P_R , Q is decreased and R is increased.

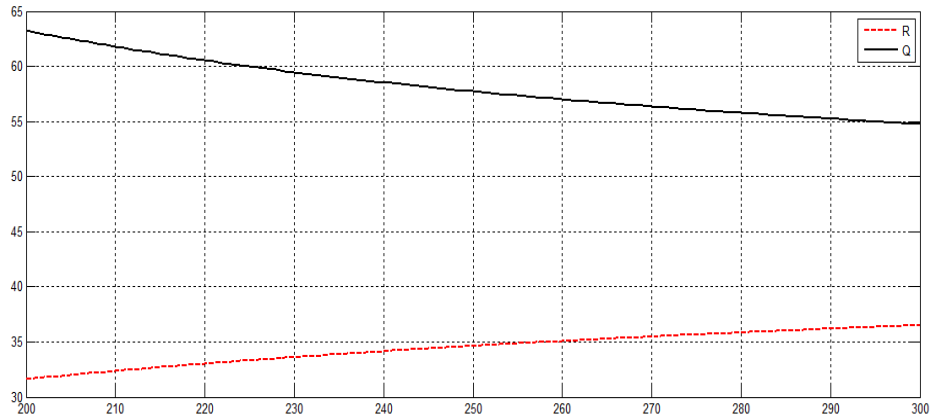


Figure 4. Effect of Capacity of remanufacturing (p_R)

Affect from D changes in figure (5) shows that in small values of D , R and Q are close to each other. Through increase of D , Q would be increased and R will be decreased with fixed rate.

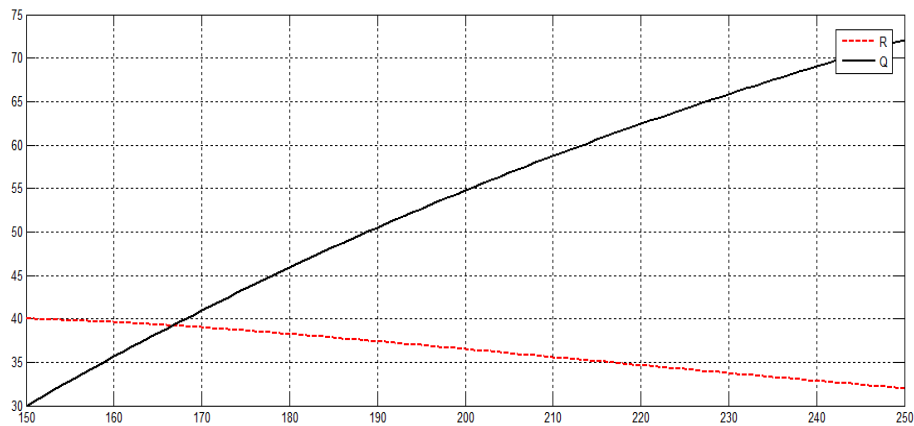


Figure 5. Effect of demand rate (D)

Affect from C_{HR} changing (figure 6) shows that R and Q will be decreased with fixed rate, through increase of C_{HR} . Also, R value is relatively smaller than Q .

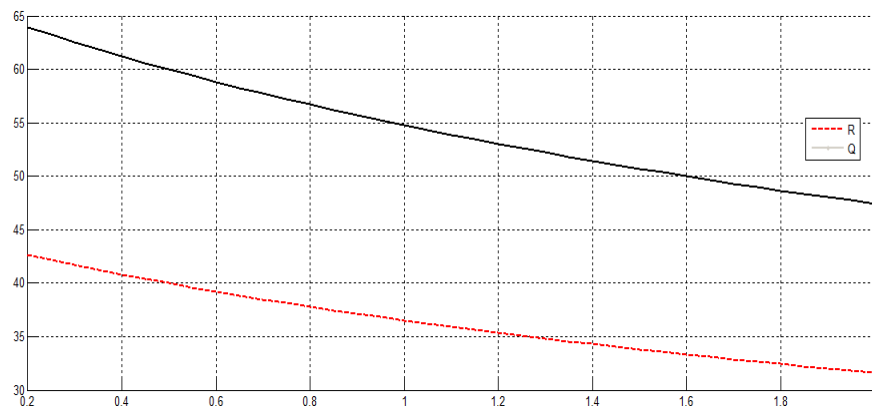


Figure 6. Effect of maintenance cost of returned items for remanufacturing (C_{HR})



From above analysis, it is clear that parameters C_o , P_R , D , and C_{HR} have to be kept small, to the extent possible. This helps the balance to be maintained between R and Q ; so that, both values will be kept close to each other. We are aiming at using returned items to make remanufacturing equal to the products from direct production. From the model analysis, it can be concluded that the cost of ordering new products, the capacity of the remanufacturing process, the final product demand, the maintenance costs of returning items inventory for remanufacturing, and the maintenance cost of new product inventory for should be looked at a low level.

CONCLUSION

Since reverse supply chain is the most important factor in modern production, input resources to the production system may be put forward with less expense, in form of returned items for remanufacturing. Through deduction of input resources costs, profitability of manufacturing systems will be increased. In the paper, a model of inventory system analysis has been presented, in which demand could be calculated through remanufactured and newly produced items. In such a system, returned items are used as raw materials, leading to minimum level of raw material usage. Interpretive approach of modeling used in the model shows that reverse logistic variables are regularly found in reverse supply chain. From among advantages of using the method, we may refer to simultaneous calculation of optimized level of newly produced items, and optimized level of returned items for remanufacturing with the aim of minimizing wastes, and achieving competitive advantage of transformation cost. Moreover, the company may use the same production line for a longer period of time. Other studies in respect of the results from this research may be performed as follows: researchers may add other aspects of reverse supply chain such as recycling; rate of collection and/ or rate of demand could be considered as random variables; and, final suggestion is that, a probable model would be discovered and developed in terms of reverse supply chain with remanufacturing.

References

- Arvind Jayant, Gupta P., Garg S.K., “Perspectives in Reverse Supply Chain Management(R-SCM): A State of the Art Literature Review “, *Jordan Journal of Mechanical and Industrial Engineering*, Volume 6, Number 1, Feb. (2012), Pages 87 - 102
- Bazan E., Jaber M.Y., Zanoni S., “A review of mathematical inventory models for reverse logistics and the future of its modelling: An environmental perspective “, *Applied Mathematical Modelling*, (2015a), doi: 10.1016/j.apm.2015.11.027.
- Bazan Ehab, Jaber Mohamad, Ahmed M.A., Saadany El, “Carbon emissions and energy effects on manufacturing–remanufacturing inventory models “, *Computers & Industrial Engineering* 88, (2015b), 307–316. <https://doi.org/10.1016/j.cie.2015.07.002>
- Behret H., Korugan A., “Performance analysis of a hybrid system under quality impact of Returns “, *Comput. Ind. Eng.* 56 (2), (2009), 507–520. <https://doi.org/10.1016/j.cie.2007.11.001>
- Bei W., Linyan S., “A review of reverse logistics “. *Applied Sciences*, 7, (2005), 16–29.



- Che-Fu, Hsueh n, “An inventory control model with consideration of remanufacturing and product life cycle “, *Int. J. Production Economics* 133, (2011), 645–652. <https://doi.org/10.1016/j.ijpe.2011.05.007>
- Choi D.W., Hwang H., Koh S.G., “A Generalized Ordering and Recovery Policy for Reusable Items “, *European Journal of Operational Research*, 182, (2007), 764–774. <https://doi.org/10.1016/j.ejor.2006.08.048>
- Dale S., R. S., Rogers, Tibben-Lembke, “Going backwards: Reverse logistics trends and practices “(Vol. 2) (1999).
- Dobos I., Richter K., “A production/recycling model with stationary demand and return rates “. *Central European Journal of Operations Research*, 11, (2003), 35–46. <https://doi.org/10.1016/j.ijpe.2003.09.007>
- El Saadany A. M. A., Jaber M. Y., “A production/remanufacturing inventory model with price and quality dependent return rate “. *Computers & Industrial Engineering*, 58, (2011), 352–362. <https://doi.org/10.1016/j.cie.2009.01.017>
- El Saadany A. M. A., Jaber M. Y., “The EOQ repair and waste disposal model with switching costs “. *Computers & Industrial Engineering*, 55, (2008) 219–233. <https://doi.org/10.1016/j.cie.2008.01.016>
- Fleischmann M., Kuik R., Dekke R., “Controlling inventories with stochastic item returns: a basic model “. *Eur. J. Oper. Res.* 138 (1), (2002), 63–75. [https://doi.org/10.1016/S0377-2217\(01\)00100-X](https://doi.org/10.1016/S0377-2217(01)00100-X)
- Fleischmann, M., Bloemhof-Ruwaard R., Dekker E., van der Laan, J.A., van Nunen, L.N., “Quantitative models for reverse logistics: a review “, *Eur. J. Oper. Res.* 103(1), (1997) 1-17. [https://doi.org/10.1016/S0377-2217\(97\)00230-0](https://doi.org/10.1016/S0377-2217(97)00230-0)
- Inderfurth K., van der Laan E., “Leadtime effects and policy improvement for stochastic inventory control with remanufacturing “. *Int. J. Prod. Econ.* 71, (2001) 381–390. [https://doi.org/10.1016/S0925-5273\(00\)00135-3](https://doi.org/10.1016/S0925-5273(00)00135-3)
- Ozceylan E., Paksoy T., Bekta T. “Modeling and optimizing the integrated problem of closed-loop supply chain network design and disassembly line balancing“, *Transportation Research Part E: Logistics and Transportation Review*, 61 (2014), pp. 142-164
- Koh S.G., Hwang H., Ko K.I., Sohn C.S., “An optimal ordering and recovery policy for reusable items “. *Computers and Industrial Engineering* 43, (2002) 59–73. [https://doi.org/10.1016/S0360-8352\(02\)00062-1](https://doi.org/10.1016/S0360-8352(02)00062-1)
- Konstantarasa I., Papachristos S., “A Note on: Developing an Exact Solution for an Inventory System with Product Recovery “, *International Journal of Production Economics*, 111, (2008) 707–712. <https://doi.org/10.1016/j.ijpe.2007.03.021>



- Pal, Brojeswar, Shib, Sankar Sana, Kripasindhu, Chaudhuri, “A stochastic inventory model with product recovery “, *CIRP Journal of Manufacturing Science and Technology* 6, (2013) 120–127. <https://doi.org/10.1016/j.cirpj.2013.01.001>
- Panagiotidou, Nenes, Sofia, Dekker, Rommert, “Inventory control policies for inspection and remanufacturing of returns: A case study George “, *Int. J. Production Economics* 125, (2010) 300–312
- Poles Roberto, “System Dynamics modelling of a production and inventory system for remanufacturing to evaluate system improvement strategies “, *Int. J. Production Economics* 144, (2013) 189–199. <https://doi.org/10.1016/j.ijpe.2013.02.003>
- Richter K., “The EOQ repair and waste disposal model with variable setup numbers “, *Eur. J. Oper. Res.* 95(2) (1996a) 313–324. [https://doi.org/10.1016/0377-2217\(95\)00276-6](https://doi.org/10.1016/0377-2217(95)00276-6)
- Richter K., “The extended EOQ repair and waste disposal model “, *Int. J. Prod. Econ.* 45(1-3) (1996b) 443–447. [https://doi.org/10.1016/0925-5273\(95\)00143-3](https://doi.org/10.1016/0925-5273(95)00143-3)
- Richter K., Dobos I., “Production-inventory control in an EOQ-type reverse logistics system. In: Dyckhoff, H., Lackes, R., Reese, J. (Eds.) “, *Supply Chain Management and Reverse Logistics*. Springer, New York, (2004) pp. 163–180. https://doi.org/10.1007/978-3-540-24815-6_7
- Sheu J.B., Chen Y.J. “Impact of government financial intervention on competition among green supply chains “, *Int. J. Prod. Econ.* 138(1), (2012)201-213. <https://doi.org/10.1016/j.ijpe.2012.03.024>
- Silva Filho O. S., Salviano I. R., “Optimizing a Production-Inventory Systems with Deteriorating and Remanufacturing Products “, 6th IFAC Conference on Management and Control of Production and Logistics, the International Federation of Automatic Control September 11-13, (2013). Fortaleza, Brazil <https://doi.org/10.3182/20130911-3-BR-3021.00091>
- Sun X., Wu M., Hu F., “Two-Period Inventory Control with Manufacturing and Remanufacturing under Return Compensation Policy “. Hindawi Publishing Corporation *Discrete Dynamics in Nature and Society* (2013).
- Teunter R., Tang O., Kaparis K., “Heuristics for the economic lot scheduling problem with returns “, *Int. J. Prod. Econ* (2009). <https://doi.org/10.1016/j.ijpe.2008.08.036>
- Teunter R.H., “Economic order quantities for recoverable item inventory system “, *Nav. Res. Logist.* 48(6) (2001) 484–495. [10.1002/nav.1030](https://doi.org/10.1002/nav.1030)
- Teunter R.H., “Economic order quantities for stochastic discounted cost inventory system with remanufacturing “, *Int. J. Logist.* 5(2) (2002), 161–175.
- Van der Laan E., Dekker R., Salomon M., “Product remanufacturing and disposal: a numerical comparison of alternative control strategies “. *International Journal of Production Economics* 45, (1996) 489–498. [https://doi.org/10.1016/0925-5273\(95\)00137-9](https://doi.org/10.1016/0925-5273(95)00137-9)



- Van der Laan E., Teunter R.H., “Simple heuristics for push and pull remanufacturing policies “. *Eur. J. Oper. Res.* 175, (2006) 1084–1102. <https://doi.org/10.1016/j.ejor.2005.06.030>
- Van Donselaar K.H., Broekmeulen R.A.C.M., “Determination of safety stocks in a lost sales inventory system with periodic review, positive lead-time, lot-sizing and a target fill rate “. *Int. J. Prod. Econ.* 143 (2), (2013) 440–448. <https://doi.org/10.1016/j.ijpe.2011.05.020>
- Widyadana G.A., Wee H.M., “Revisiting Lot Sizing for an Inventory System with Product Recovery “. *Computers and Mathematics with Applications*, (2010) 59:2933–2939. <https://doi.org/10.1016/j.camwa.2010.02.011>
- Yu, Quanwu, Zhao, b., Zhou, “Manufacturer-remanufacturing vs supplier-remanufacturing in a closed-loop supply chain “. *Int. J. Production Economics* 176, (2016), 21–28. <https://doi.org/10.1016/j.ijpe.2016.03.001>
- Z., Feng, W., Zhiping, Y., Chen, “The equilibrium of closed-loop supply chain super network with time-dependent parameters “. *Transp. Res. Part E: Log. Transp. Rev.* 64, (2014) 1–11. <https://doi.org/10.1016/j.tre.2014.01.009>
- Zanoni S., Segerstedt A., Tang O., Mazzoldi L., “Multi-product economic lot scheduling problem with manufacturing and remanufacturing using a basic period policy “. *Comput. Ind. Eng.* 62 (4), (2012) 1025–1033. <https://doi.org/10.1016/j.cie.2011.12.030>
- Zolfagharinia H., Haughton M.A., “The benefit of information sharing in a logistics outsourcing context “. *Int. J. of Logistics Systems and Management* 13 (2), (2012) 187–208. [10.1504/IJLSM.2012.048935](https://doi.org/10.1504/IJLSM.2012.048935)
- Zolfagharinia Hossein, Hafezi Maryam, Zanjirani Farahani Reza, Fahimnia Behnam, “A hybrid two-stock inventory control model for a reverse supply chain “. *Transportation Research Part E: Logistics and Transportation Review*, Volume 67, (2014), 141–161, *Transportation Research Part E* 67, 141–16. <https://doi.org/10.1016/j.tre.2014.04.010>

